


„MGK 1000C“ with 3 switch points



Technical Data

Mains power:	18 - 36 V DC
Power input:	500 mA
Power rating:	15 W
Switching output:	3 switch points (potential free) max. 60 V AC – 3 A
Signal interrupt control:	yes, > 10 V
Operating temperature:	-25 °C up to +60 °C
Temperature drifting:	< 1%
Electronic housing:	Alu-cast, black anodised
Housing dimensions:	165 x 105 x 65 mm
Fastening:	Standard rail
Connectors:	Combicon-Phönix

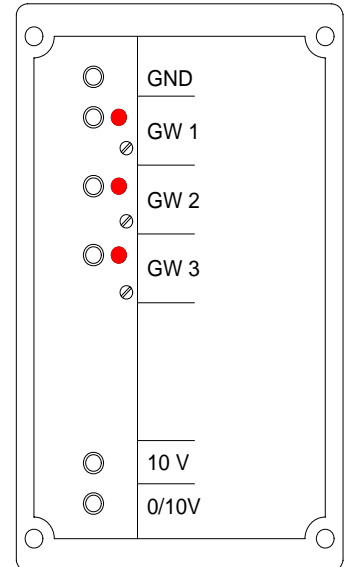