

PRECIMETER


~Casting Evolution~

MGK 1000C-analog with 2 switch points



Technical Data

Mains power:	18 - 36 V DC
Power consumption:	500 mA
Power rating:	15 W
Signal output:	2 Switch points (potential free)
Signal interrupt control:	Yes > Max. (potential free)
Operating temperature:	-25 °C to +60 °C
Temperature drifting:	< 1%
Electronic housing:	Alu-cast, black anodised
Housing dimensions:	165 x 105 x 65 mm
Fastening:	Standard rail
Connectors:	Combicon-Phoenix

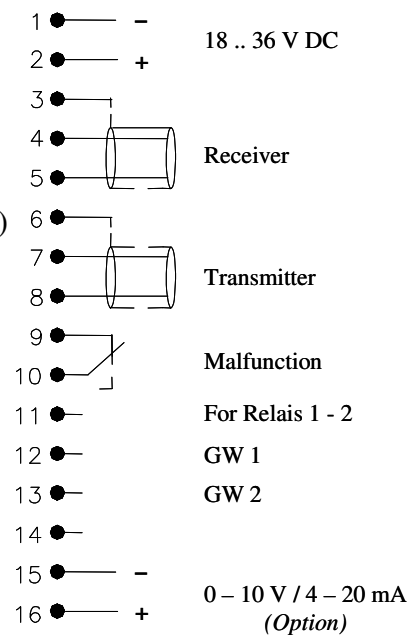

Carli Precimeter GmbH

Kirberg 5, D-51674 Wiehl
carli @ precimeter.com

Tel.: +49 (0)2262-701624 Fax: -701625
www.precimeter.com/dc