



„MGK 1000C“ with analog output

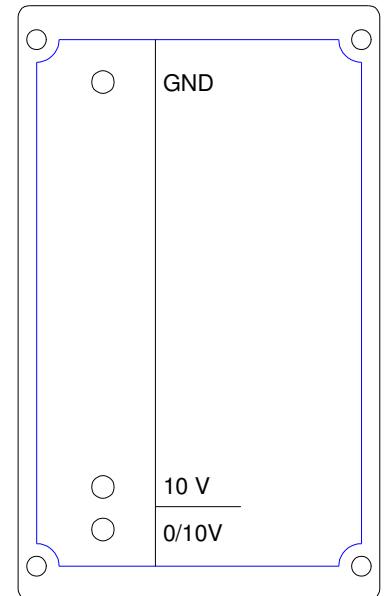

Technical Data

Mains power:	18 - 36 V DC
Power input:	500 mA
Power rating:	15 W
Output signal:	(0) 4 - 20 mA or 0 – 10 V
Switching output:	Failure (potential free)
Signal interrupt control:	yes > 20 mA or >10 V
Operating temperature:	-25 °C to +60 °C
Temperature drifting:	< 1%
Electronic housing:	Alu-cast, black anodised
Housing dimensions:	165 x 105 x 65 mm
Fastening:	Standard rail
Connectors:	Combicon-Phönix

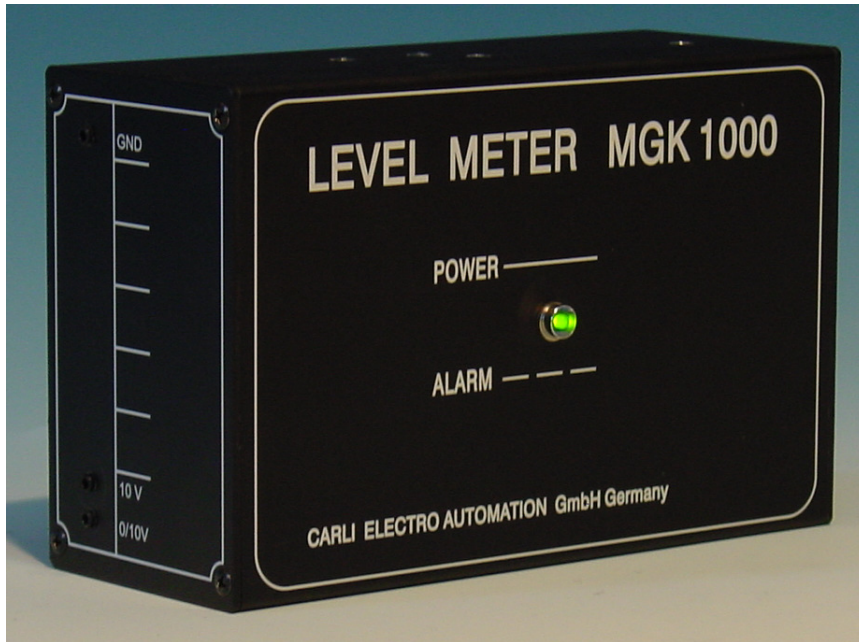