


„MGK 1000R“ with 2 switch points for ladle automation



Technical Data

Mains power:	18 - 36 V DC
Power input:	200 mA
Power rating:	5 W
Relay output:	2 switch points (potential free) max. 60 V AC – 3 A
Signal interrupt control:	yes > 10 V
Operating temperature:	-25 °C up to +60 °C
Temperature drift:	< 1%
Housing:	Alu-cast, black anodised
Housing dimensions:	105 x 105 x 50 mm
Fastening:	Standard rail
Connectors:	Combicon-Phoenix

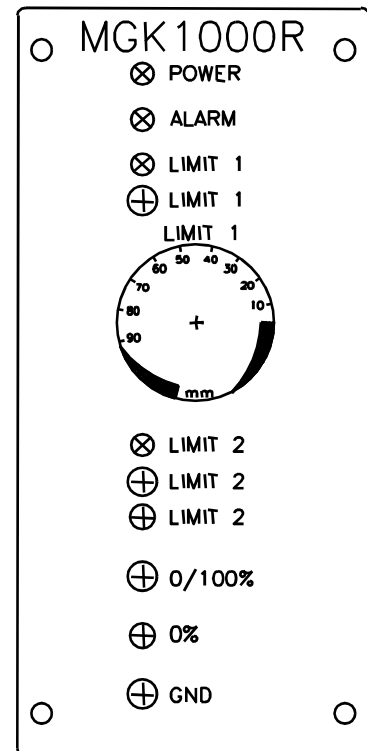